
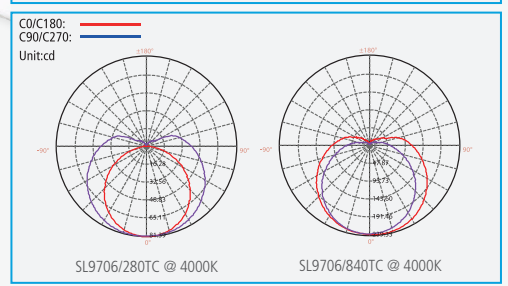
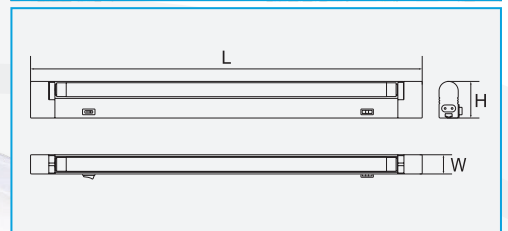


3 IN 1 LED LINKABLE

# SEAMLESS SLIMLINE

SL9706 TC

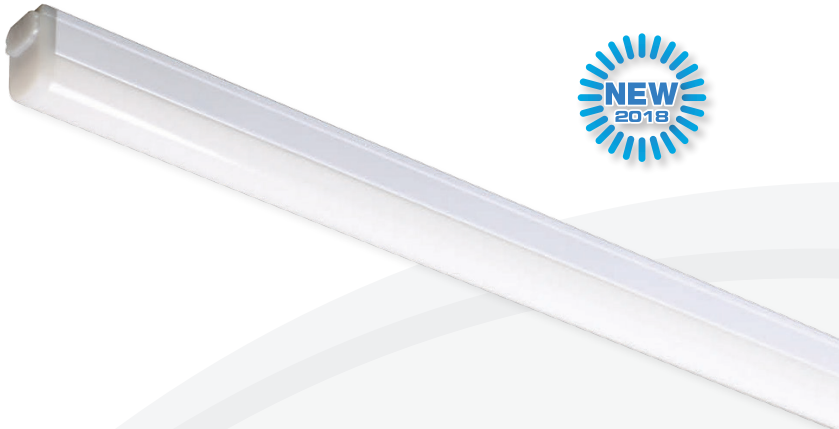

## FEATURES

- Select colour temperature with DIP switch
- Polycarbonate body
- Opal polycarbonate diffuser
- High efficiency SMD LED chips
- Built-in constant current non-dimmable LED driver
- Double insulation
- 1.2 m flex & 2 pin plug
- Mounting brackets and connectors
- (Straight & 10 cm flexible) included

## ACCESSORIES

- SL9706/32CM LINK (L 320 mm)
- SL9706/76CM LINK (L 760 mm)

## Mixed connections maximum 240W

SL9706/280TC	1	2	3	4...	55pcs
SL9706/540TC	1	2	3	4...	25pcs
SL9706/840TC	1	2	3	4...	17pcs
SL9706/1140TC	1	2	3	4...	12pcs
SL9706/1440TC	1	2	3	4...	10pcs

## TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	BEAM ANGLE (°)	CRI (Ra)	DIMENSIONS (LxWxH) (mm)	FITTING COLOUR
SL9706/280TC	240	4	300/380/300	3000/4000/5000	105	>80	280 x 23 x 36	White
SL9706/540TC	240	9	750/800/750	3000/4000/5000	105	>80	540 x 23 x 36	White
SL9706/840TC	240	13	1050/1200/1050	3000/4000/5000	105	>80	840 x 23 x 36	White
SL9706/1140TC	240	18	1550/1600/1600	3000/4000/5000	105	>80	1140 x 23 x 36	White
SL9706/1440TC	240	22	1800/2000/1800	3000/4000/5000	105	>80	1440 x 23 x 36	White

! Specifications above are for reference only and may vary without prior notice