
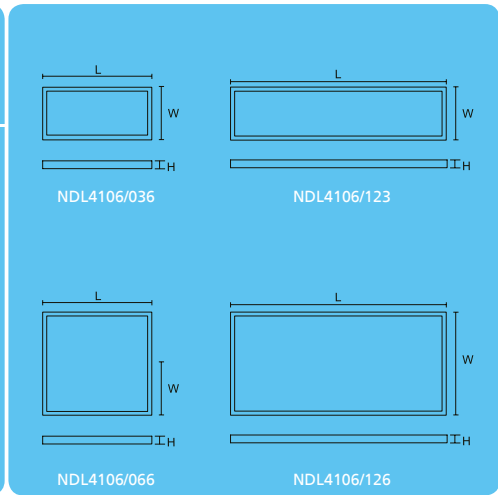



LED PANEL

NDL4106

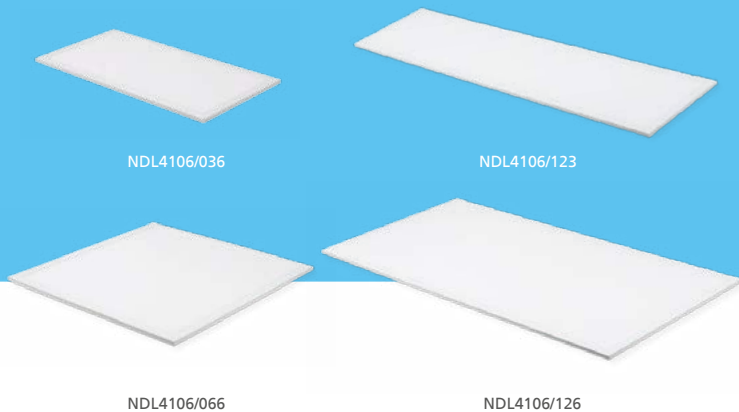

FEATURES

- SUPER Slim design
- Extruded aluminium frame
- Powder coated finish
- High transparency opal polystyrene back diffuser
- Built-in high efficiency SMD LED chips
- Constant current LED driver included
- 1.2m flex & plug fitted
- Available fitting colours: White
- Available colour temperature: Warm White, Cool White, Daylight
- IP20 suitable for indoor use only
- Non-dimmable

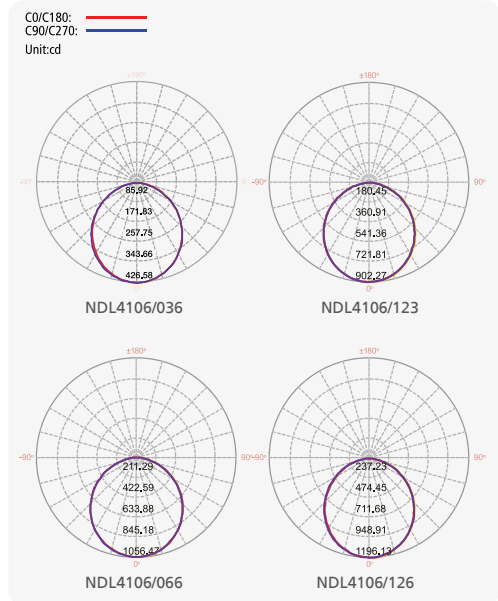

OPTIONS

- Analogue dimming (Trailing edge, 1-10V)
- Digital dimming (DSI, DALI)

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI (Ra)	BEAM ANGLE (°)	DIMENSIONS (LxWxH) (mm)	FITTING COLOUR
NDL4106/036TC	240	18	2000	3000/4000/6000	>80	100	595 x 295 x 12	White
NDL4106/066WW	240	30	3100	3000	>80	100	595 x 595 x 12	White
NDL4106/066CW	240	30	3200	4000	>80	100	595 x 595 x 12	White
NDL4106/066DL	240	30	3300	6000	>80	100	595 x 595 x 12	White
NDL4106/123WW	240	30	3100	3000	>80	100	1195 x 295 x 12	White
NDL4106/123CW	240	30	3200	4000	>80	100	1195 x 295 x 12	White
NDL4106/123DL	240	30	3300	6000	>80	100	1195 x 295 x 12	White
NDL4106/126WW	240	48	5000	3000	>80	100	1195 x 595 x 12	White
NDL4106/126CW	240	48	5300	4000	>80	100	1195 x 595 x 12	White
NDL4106/126DL	240	48	5500	6000	>80	100	1195 x 595 x 12	White

Specifications above are for reference only and may vary without prior notice